


***The Double Life
Corporation, Inc.***

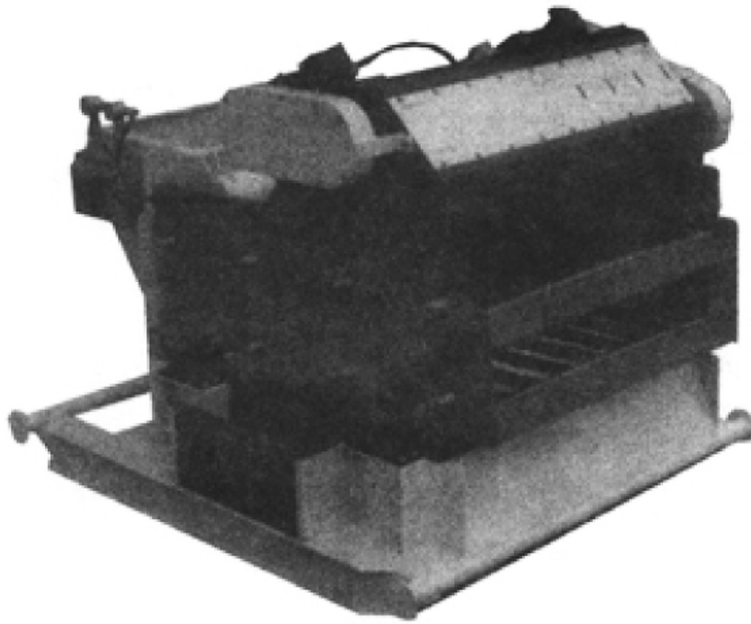

**The Double Life™
Corporation, Inc.**

**TANDEM
LINEAR SHAKER**

The Double Life Single, Dual, and Triple Tandem Deck Linear Drive Shale Shakers

The proven design of the Double Life Corporation Linear Drive Shaker has shown to be a cost-effective unit over other linear drive machines. The Double Life Corporation has incorporated standard off-the-shelf motors (Class I, Group D, Explosion Proof) in lieu of complicated and costly vibrator motor combinations.

The quality design of the Double Life Tandem Shaker is enhanced with our choice of material. The screen support or ribbing is stainless steel, which greatly adds to the life of the machine. Tensioning of screens is accomplished with rapid change spring tension bolt assemblies, therefore reducing the time required to change a screen.


The Double Life Corporation has also utilized the flow back pan feature in this shaker model

to fully optimize the 40 square feet of screen area on each tandem basket. The tandem design allows the screen choice to be regulated to finer meshes on the lower deck by removal of courser solids on the upper deck. The use of heavier/courser mesh screens on top results in increased life of finer mesh screens on the lower deck.







Simplicity is the key to the Double Life Linear Tandems. The deck angle can be adjusted by bolts on the side sheets to change deck angle from +3 to -3 degrees. This gives the contractor optimum flexibility on the shaker for dryer solids discharge.

The screen size for this shaker is 48 X 60 which is the most readily available in the industry. There are many different styles of screens available for this shaker.

SINGLE TANDEM LINEAR DRIVE SHAKER (48 X 60)

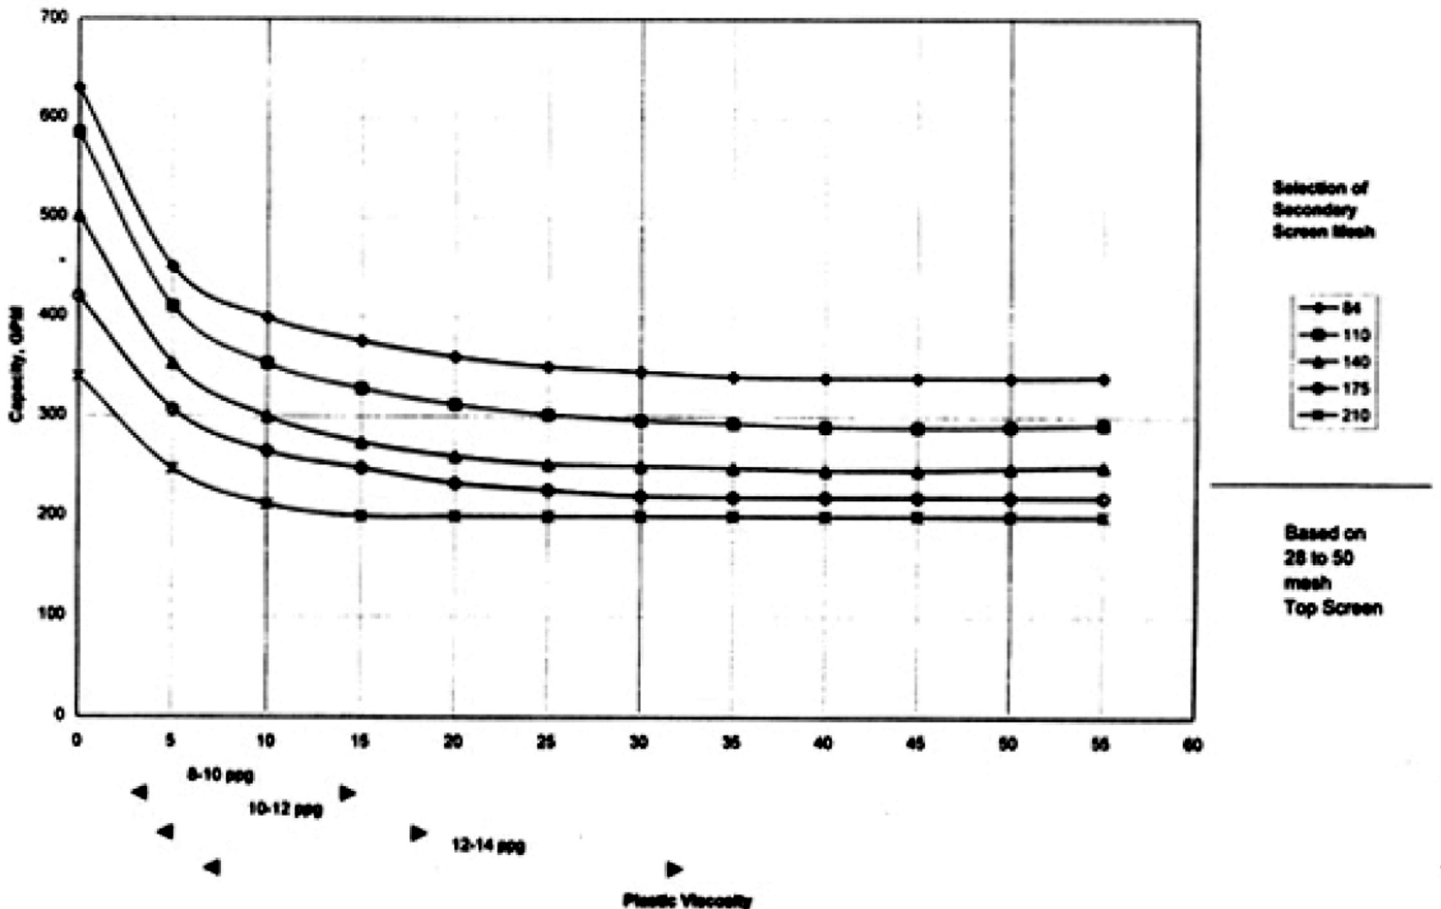

Actual Flow Rates will vary in relation to mud properties, etc.

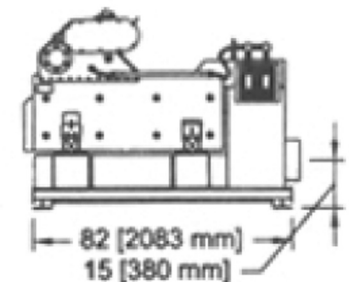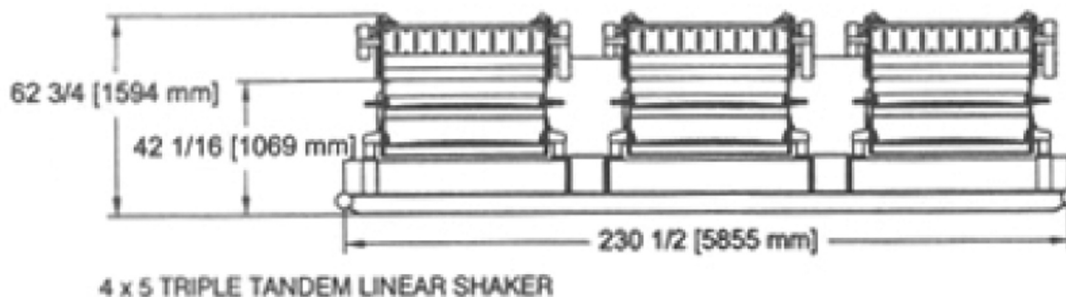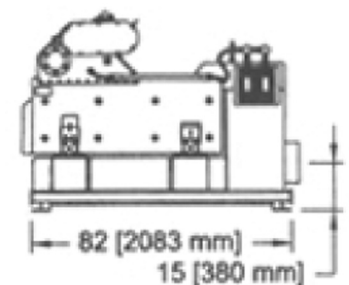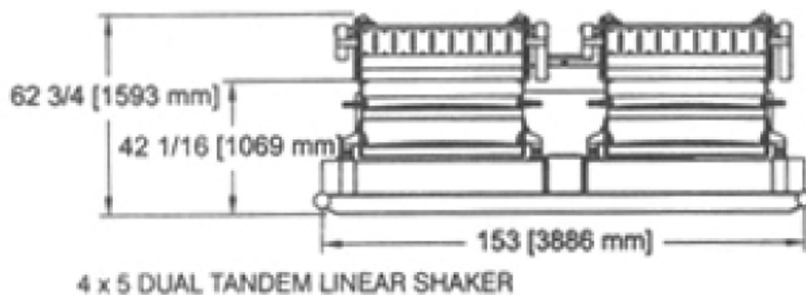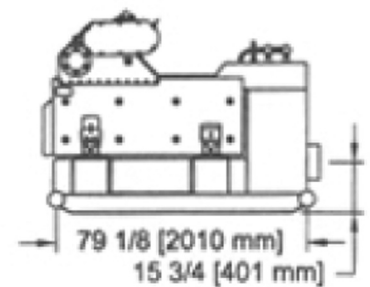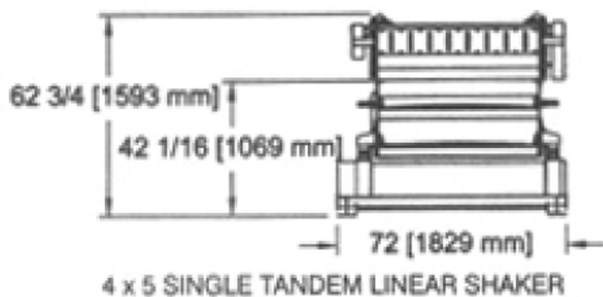

Specifications

Estimated		
Weight:	Single	3200 lbs. (1455 kg.)
	Double	6100 lbs. (2773 kg.)
	Triple	9600 lbs. (4364 kg.)
Weir Height:	38 in.
Flow Rate*:	Up to 625 gpm (2366 lpm) per screen bed

MOTOR SPECIFICATIONS

	60 Hz	50 Hz
Horsepower (kW):	5 (3.73)	4.2 (3.13)
RPM:	1750	1450
Voltage:	230/460	190/380
Phase:	3	3
Area Classification:	Class 1 Div. 1, Group D	

*Actual Flow Rates vary in relation to fluid properties.

The Double Life Corporation
4 x 5 Style Linear Shaker
Recommended Spare Parts List per Basket

<u>PART NUMBER</u>	<u>QUANTITY</u>	<u>DESCRIPTION</u>
700007	16	Tension Bolt Assembly
540022	4	Shock Mount
500026	1	LH Drive Belt
500025	1	RH Drive Belt
580013	14	Screen Cushion
590004	2	Tension Rail
500027	4	1 Lb. Duct Seal
590005	4	Cross Support
500011	6	Heater Elements

WARRANTY

The Double Life Corp., Inc. warrants its products to be free from defects in material and/or workmanship under normal use and service for a period of one (1) year from date of shipment. The liability for any such defect shall be limited to the repair or replacement of such products or, at Double Life™ option, the refunding of the purchase price. This warranty is expressly in lieu of all other warranties and representations, expressed or implied, and of all other obligations or liabilities on the part of Double Life™, which shall not be liable for consequential damages for any breach of warranty. Any controversy or dispute arising out of the sale of Double Life™ products shall be determined in accordance with the laws of the State of Oklahoma.