
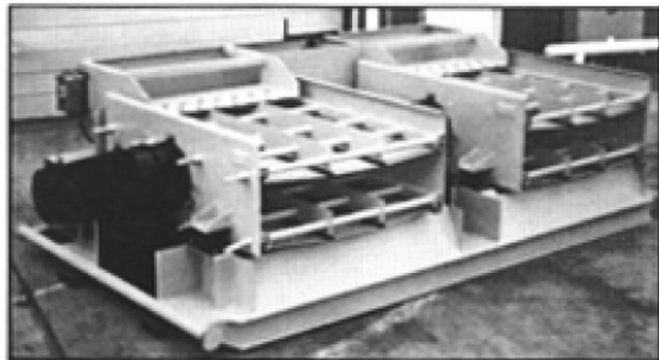
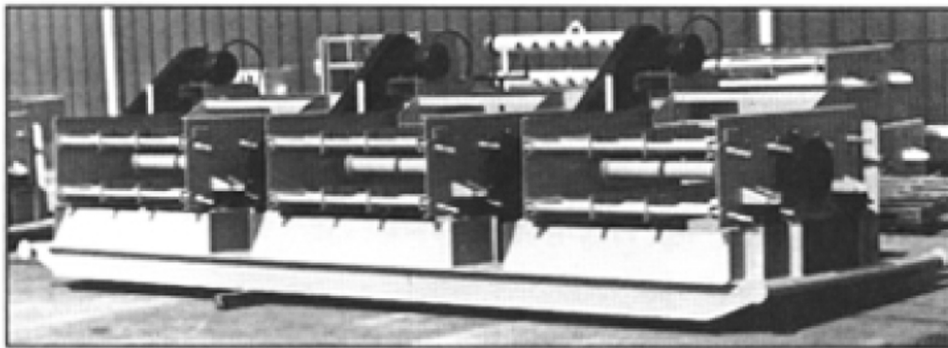


The Double Life Corporation, Inc.

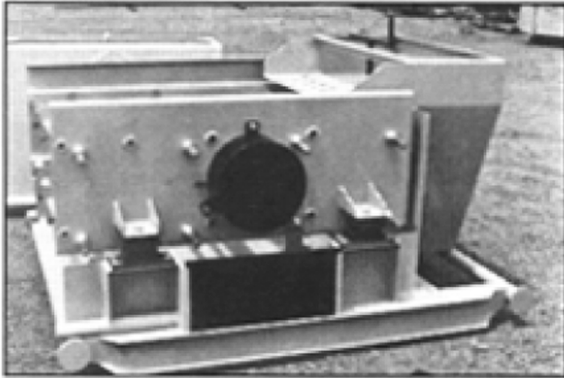

The Double LifeTM Corporation, Inc.

TANDEM SHAKERS

The Double Life Corporation Inc. • 200 N. Rockwell Oklahoma City • Oklahoma 73127
Voice : 405-789-7867 • Facsimile :405-792-2202 • Toll Free : 877-888-7867

THE DOUBLE LIFE TANDEM SHAKER

The Double Life Tandem Shaker is a high volume, low maintenance machine. The orbital motion provides a constant and efficient method of solids removal. This shaker has proven itself with high flow rates due to the horizontal tandem screen design. The top screen separates the larger cuttings while the lower, finer mesh screen separates the smaller cuttings. Each deck has one adjustable and one permanent tension rail for easy and quick screen changes.


The Tandem Shakers are available with a five horsepower explosion proof motor and starter. This machine can accommodate a flow rate of up to 800 gallons per minute. The unit is sandblasted and coated with a high solids, epoxy mastic primer designed for corrosion protection. The finish coat is an Imron polyurethane enamel.

The Double Life Tandem Shakers provide the same mesh combinations, wire diameters, opening size and cut point capabilities as other tandem designs. This improved solids removal performance has shown to be beneficial in solids removal throughout the entire drilling program.



The Tandem utilizes the latest in screen technology and the dual deck multiple screens allow the optimum flexibility when selecting screen mesh options. The versatility of this unit protects and increases fine mesh screen life while eliminating the need for dual stage scalping shaker systems.

These units perform to the same cut point and process capacities as other tandem shakers available in today's marketplace.



The unique combination of years of solids control experience, innovative design, quality manufacturing and parts interchangeability has made possible the advent of a quality built shaker at a truly economical price.

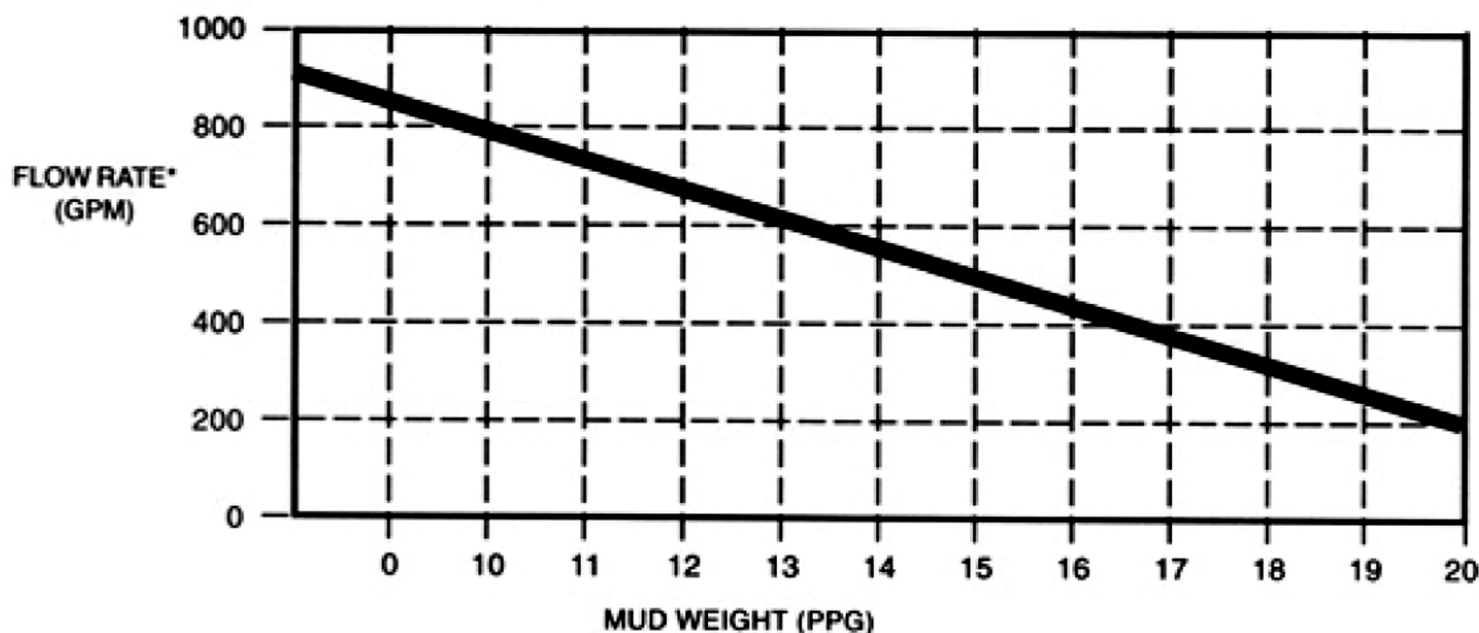



This Flow Rate Chart based on each Tandem Basket tested with Water/Sand.

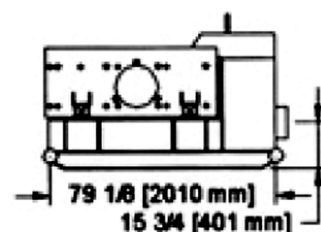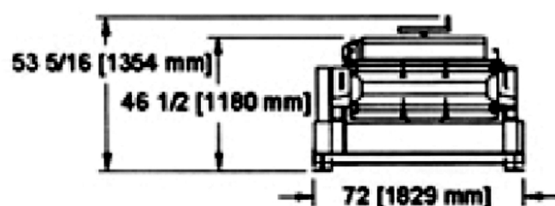

SINGLE TANDEM-SCREEN SHAKER **WEIGHT: 2500 LBS. (1136 KG.)**

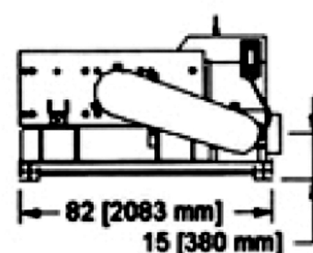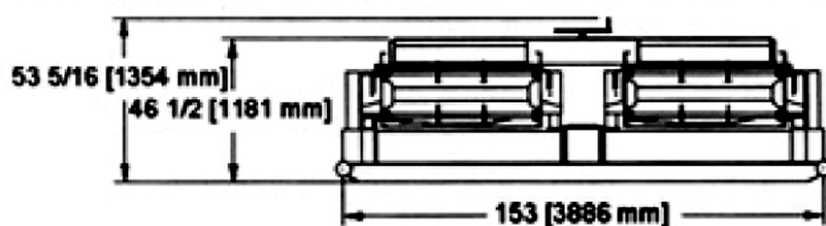

DUAL TANDEM-SCREEN SHAKER **WEIGHT: 5000 LBS. (2773 KG.)**

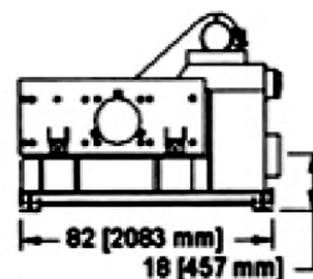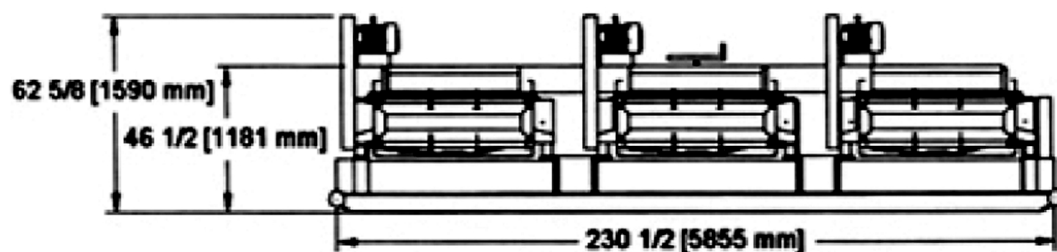

TRIPLE TANDEM-SCREEN SHAKER **WEIGHT: 7800 LBS. (3545 KG.)**

The Double Life Corporation

TANDEM SHAKER

Recommended Spare Parts Per Basket

<u>1</u> <u>YR</u>	<u>2</u> <u>YR</u>	<u>3</u> <u>YR</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>
1	2	3	700002	Drive Belt
4	8	12	700005	Shock Mount
1	2	3	700048	Floating Tension Rail, Left Hand Basket
6	12	18	700052	Tension Rail Replacement Clip
16	32	48	700007	Tension Bolt Assembly
20	40	60	700006	Screen Cushion
	1	2	700058	Starter
	3	6	700059	Overload Heater**
2	4	6	700043	Grease Fitting Assembly
		1	700001	Electric Motor**

**Specify Motor Voltage

WARRANTY

The Double Life™ Corp., Inc. warrants its products to be free from defects in material and/or workmanship under normal use and service for a period of one (1) year from date of shipment. The liability for any such defect shall be limited to the repair or replacement of such products or, at Double Life™ option, the refunding of the purchase price. This warranty is expressly in lieu of all other warranties and representations, expressed or implied, and of all other obligations or liabilities on the part of Double Life™, which shall not be liable for consequential damages for any breach of warranty. Any controversy or dispute arising out of the sale of Double Life™ products shall be determined in accordance with the laws of the State of Oklahoma.